

CABIN AIR FILTER

IDENTIFICATION / INSTALLATION


IMPORTS

AF1011 / AFC1011


**Acura CL, CL Type S, TL, TL Type S;
Honda Accord**




- OE:** 80291-S84-A01
Fits: 2001-03 Acura CL, CL Type S
1999-2003 Acura TL
2002-03 Acura TL Type S
1998-2002 Honda Accord
Size: 11 9/16 x 3 25/32 x 1 5/32
(293.7 x 96.0 x 29.4)
Note: 2 Required per Vehicle (Sold Individually)

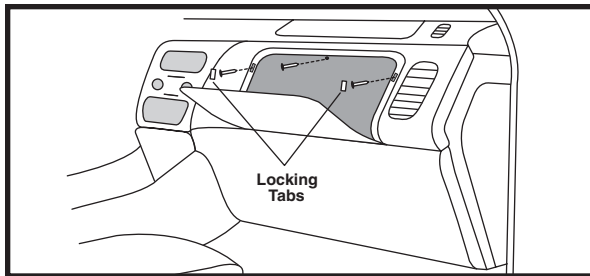


1. Open passenger side door.
2. Open glove compartment.
3. Remove square locking tabs from either side of glove compartment opening.
4. Remove screws on left, center and right of glove compartment opening.

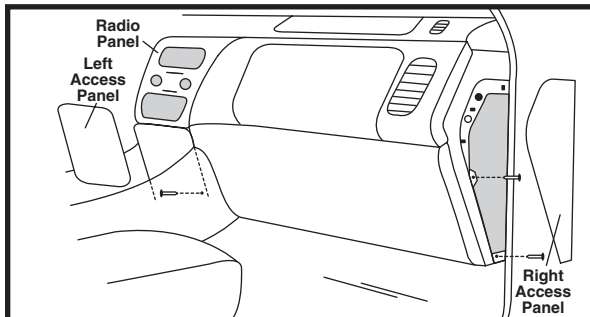

5. Close glove compartment.
6. Remove right access panel on right side of glove compartment.
7. Remove screws under right access panel.
8. Remove left access panel (under radio panel) on left side of glove compartment.
9. Remove screw on right side under left access panel.

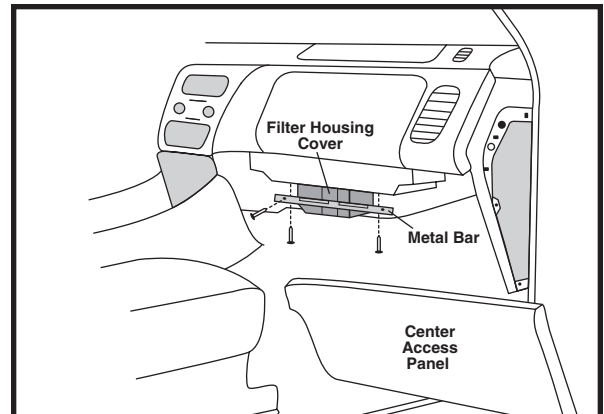

10. Remove center access panel under glove compartment.
11. Remove two screws under glove compartment and one screw on metal bar.

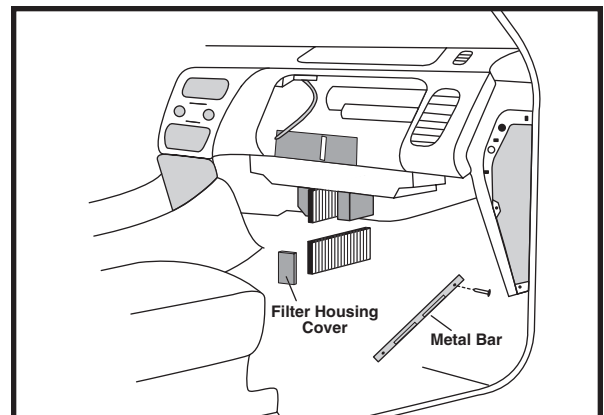

12. Remove glove compartment and disconnect light wire on left side.
13. Remove remaining screw on metal bar and remove metal bar.
14. Remove filter housing cover.
15. Pull out first filter. Slide second filter into opening, then remove.
16. Replace filters in reverse order and reassemble.

Notice: The information provided is based on the latest authoritative information available at press time. However, due to manufacturers' changes, and year and model variations, Hastings Premium Filters cannot be responsible for misapplications and instruction errors.



4400 East Highway 30 ■ P.O. Box 6006
Kearney, NE 68848-6006
PH: 800-887-8836 ■ FAX: 800-210-6906
Internet: www.hastingsfilter.com